



DELTA CHEMTOPTOP MF


Heavy Duty Self-Smoothing Polyurethane Floor



DESCRIPTION

A flow-applied, self-smoothing, polyurethane flooring system with a smooth matt surface finish.

SYSTEM DESIGN

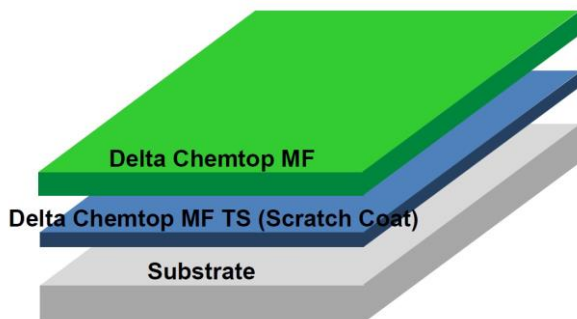

USES

- ❖ Chemical resistant floor for chemical process, containment area and wash down rooms.
- ❖ Hygienic floor for kitchen, wetfood, beverage processing and packaging plants, pharmaceutical, electronic and chemical plants.
- ❖ Mechanically durable floor for loading docks and warehouses.

BENEFITS

- ❖ High impact and abrasion resistance.
- ❖ High chemical resistance.
- ❖ Easy to clean and sterilize.
- ❖ **HACCP certified to Singapore Standard** for use in facilities covered by HACCP accreditation

COLOR

Available in a range of standard colours

FINISH

Matt

SURFACE PREPARATION

Substrates will normally be concrete or polymer modified screeds with minimum compressive strength of 25N/mm² and pull-off strength of 1.5N/mm². Preferably vacuum shot blast the surface with non-impact method. Concrete surface planer, grit blasting and surface grinding or other mechanical means until a profile is evident can be satisfactory. Substrate must be clean and free from any contamination. For other specific application, consult DELTA INTERCONTINENTAL P/L.

APPLICATION

- ❖ Scratch coat of Delta Chemtop MF TS @ 1.9kg/m² (average 1mm thick).
- ❖ Body coat of Delta Chemtop MF @ 5.7kg/m² (average 3mm thick).

Delta Intercontinental Pte Ltd
38 Woodlands Industrial Park E1, #06-04
Singapore 757700

Tel : +65 6219 0700 Fax: +65 6219 2822
Email : deltaintercon@singnet.com.sg
Website : www.deltaintercon.com.sg



DELTA CHEMTOP MF

Heavy Duty Self-Smoothing Polyurethane Floor

- Mixing – Mix Part A and Part B thoroughly for 10 seconds.
Add Part C and mix content thoroughly for 1 minute.
Mixing is done by using high speed power mixer (750 rpm).

- Tools – Applied using notched rake, notched trowel, spike roller.

Recoating Time – Interval between coats: 8 hours
Maximum recoating time: 24 hours

TECHNICAL AND APPLICATION DATA

Compressive Strength	50 N/mm ²
Flexural Strength	21 N/mm ²
Dynamic E-Modulus	14,500 N/mm ²
Tensile Strength	7 N/mm ²
Concrete Adhesion	Concrete fails
Taber Abrasive Resistance (1000g, 1000rpm)	0.1g
Coefficient of Thermal Expansion	3.5 x 10 ⁻⁵ °C
Density	1.9 kg/mm/m ²
Impact Resistance	< 0.5 mm (BRE Screed Tester)
Chemical Resistance	See list attached
Recommended dry film thickness	4mm
No. of coats	1
No. of components	3
Mixing Ratio (by weight)	3 : 3 : 14 Part A : B : C
Pot Life	18 mins @ 30°C 25 mins @ 15°C 35 mins @ 8°C
Temperature Resistance	-5°C to 80°C @ 3mm

STORAGE CONDITIONS AND SHELF LIFE

All components of Delta Chemtop MF have a shelf life of 12 months in original unopened packing, stored in dry, enclosed place without exposure to direct sunlight and temperature between 15°C to 35°C, protected from frost.

MAINTENANCE

To maintain the appearance of the floor, all spillage must be removed immediately and clean regularly using rotary scrubber, wash and vacuum in conjunction with suitable detergents and waxes.

PACKAGING

20 kg set

Comprises of: Part A – 3 kg
Part B – 3 kg
Part C – 14 kg

SAFETY

Some components of this product may be hazardous during mixing and application. Always use with suitable personal protective equipment. Close container tightly after use. Keep out of reach of children.

Delta Intercontinental Pte Ltd
38 Woodlands Industrial Park E1, #06-04
Singapore 757700

Tel : +65 6219 0700 Fax: +65 6219 2822
Email : deltaintercon@singnet.com.sg
Website : www.deltaintercon.com.sg



DELTA CHEMTOP MF

Heavy Duty Self-Smoothing Polyurethane Floor

Chemical Resistance List

Chemical	Result
Acetic Acid (10%)	No effect
Acetic Acid (25%)	No effect
Acetic Acid (40%)	No effect
Acetic Acid (99%)	Faint mark (discoloration)
Brine (Saturated sodium chloride)	No effect
Calcium Chloride (50%)	No effect
Calcium Hydroxide (Saturated)	No effect
Citric Acid (20%)	No effect
Citric Acid (60%)	No effect
Detergent (Alkaline)	No effect
Formic Acid (40%)	Faint mark (discoloration)
Formic Acid (70%)	Faint mark (discoloration)
Formic Acid (90%)	Severe mark (discoloration)
Formic Acid (99%)	Severe mark (discoloration)
Gasoline	No effect
Hydrochloric Acid (10%)	No effect
Hydrochloric Acid (37%)	Faint mark (stain)
2-propanol (99%)	No effect
Jet Fuel	No effect
Kerosene	No effect
Methanol (99%)	No effect
Methylene Chloride (99%)	No effect
Methyl Ethyl Ketone (99%)	No effect

Chemical	Result
Methyl Tert-Butyl Ether	No effect
Motor Oil	No effect
Nitric Acid (5%)	Faint mark (stain)
Nitric Acid (30%)	Severe mark (stain)
Nitric Acid (65%)	Severe mark (stain)
Phosphoric Acid (5%)	No effect
Phosphoric Acid (40%)	No effect
Phosphoric Acid (50%)	No effect
Phosphoric Acid (85%)	No effect
Potassium Hydroxide (50%)	No effect
Sodium Chloride (Saturated)	No effect
Sodium Hydroxide (20%)	No effect
Sodium Hydroxide (32%)	No effect
Sodium Hydroxide (50%)	No effect
Sodium Hypochlorite(15%)	Faint mark (stain)
Sulfuric Acid (5%)	No effect
Sulfuric Acid (30%)	No effect
Sulfuric Acid (50%)	No effect
Sulfuric Acid (98%)	Severe mark (stain)
THF (99%)	No effect
Toluene (99%)	No effect
Distilled Water	No effect
White Spirit	No effect
Xylene (99%)	No effect