

DELTA NANO 100 PRIMER


Nano Titanium Dioxide Self-Cleaning Solution



DESCRIPTION

Delta Nano 100 Primer comprises of water-based nano-sized TiO₂ (titanium dioxide) solution. It serves as a barrier layer between Delta Starlite PU 118 and Delta Nano 100 Top.

SYSTEM DESIGN

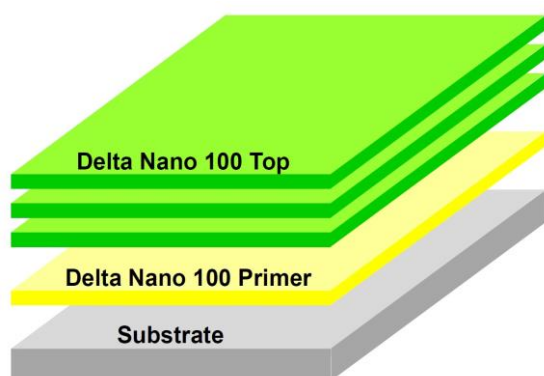

BENEFITS

- ❖ Protect painted surfaces from the oxidation effect of Delta Nano 100 Top.
- ❖ Eco-friendly technology
- ❖ **Singapore Green Label certified**

USES

- ❖ As a primer for Delta Nano 100 Top

FINISH

Transparent finishing

COLOUR

Clear – light yellowish

SURFACE PREPARATION

For Delta Nano 100 Self Cleaning Paint System, apply once Delta Starlite PU 118 is dry.

APPLICATION

- 1 pass of Delta Nano 100 Primer @ 75 – 90 m²/lit/pass

Tools – Applied by spray gun with atomized air and alternating vertical and horizontal spray movement.

Recoating Time – Min : When coating is dry.
Max: 24 hours before application of Delta Nano 100 Top.

TECHNICAL AND APPLICATION DATA

1) Industrial Hygiene Monitoring tested by Setsco	See report enclosed
---	---------------------

STORAGE CONDITIONS AND SHELF LIFE

The solution should be stored in a cool, dry place without exposure to direct sunlight. Shelf life is 12 months.

PACKAGING

1 litre/bottle

SAFETY

General PPE and safety measures for chemicals to be complied with. There should be appropriate ventilation and exhaust at application area.

Delta Intercontinental Pte Ltd
38 Woodlands Industrial Park E1, #06-04
Singapore 757700

Tel : +65 6219 0700 Fax: +65 6219 2822
Email : deltaintercon@singnet.com.sg
Website : www.deltaintercon.com.sg

Ref. No.: 052016