



DELTA STARLITE 500 (FLOOR)


Polyester Urethane Coating for Concrete Substrates



DESCRIPTION

A two component, high performance, pigmented or clear polyester urethane coating.

SYSTEM DESIGN

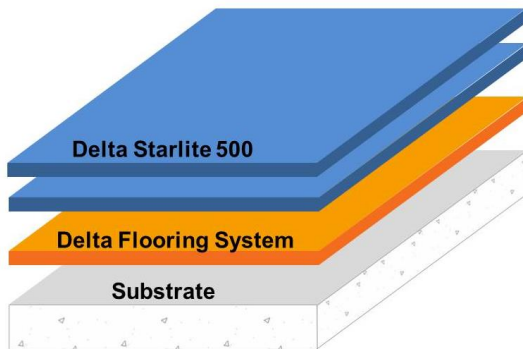

USES

- ❖ Use in areas where an extremely durable interior/exterior finish is required.
- ❖ For protection of surfaces against dusting, solvent, UV exposure and chemical attack.
- ❖ Typical applications include interior floors, exterior parking deck, passageway, apron, and as a top coat for other Delta products.

COLOR

Available in clear and range of standard colours

FINISH

High gloss, satin and matt.

PACKAGING

- ❖ 5 lit set comprises of: Part A – 4 lit
Part B – 1 lit

BENEFITS

- ❖ Good bond adhesion to non-porous substrates.
- ❖ Excellent UV and weathering resistance.
- ❖ Resistance to a wide range of chemicals.
- ❖ Easy to apply and clean.
- ❖ Extremely durable.
- ❖ Versatile – can be used as a decorative coating for vertical and horizontal substrates.
- ❖ Can be applied over most Delta Flooring Systems.
- ❖ **HACCP certified to Singapore Standard** for use in facilities covered by HACCP certification.



SURFACE PREPARATION

Substrates to be coated must be structurally sound, clean and free from any contamination. Surface preparation by light sanding. For oil/grease contaminated areas, use degreaser followed by thorough water washing and drying. For other specific application, consult DELTA INTERCONTINENTAL P/L.

Delta Intercontinental Pte Ltd
38 Woodlands Industrial Park E1, #06-04
Singapore 757700

Tel : +65 6219 0700 Fax: +65 6219 2822
Email : deltaintercon@singnet.com.sg
Website: www.deltaintercon.com.sg



DELTA STARLITE 500 (FLOOR)

Polyester Urethane Coating for Concrete Substrates

APPLICATION

- ❖ First coat of Delta Starlite 500 @ 0.10lit/m².
 - ❖ Second coat of Delta Starlite 500 @ 0.10lit/m².
- Mixing – Before mixing, stir Part A, then mix Part A and Part B thoroughly for 2 minutes using a slow speed power mixer (300-500rpm).
- Tools – Applied by brush, short nap epoxy roller or airless sprayer.
- Recoating time – Interval between coats: 8 hours.
Maximum recoating time: 24 hours.

TECHNICAL AND APPLICATION DATA

Recommended dry film thickness	100μ (2 coats)
No. of coats	2
No. of components	2
Mixing Ratio A:B (by volume)	4:1
Pot Life	60 minutes @ 30°C
Temperature Resistance	80°C

MAINTENANCE

To maintain the appearance of the floor, all spillage must be removed immediately and clean regularly using rotary scrubber, wash and vacuum in conjunction with suitable detergents and waxes.

STORAGE CONDITIONS AND SHELF LIFE

All components of Delta Starlite 500 have a shelf life of 12 months in original unopened packing, stored in dry enclosed place without exposing to direct sunlight and at temperature between 15°C to 35°C, protected from frost.

SAFETY

Product is highly flammable and contains free isocyanates. Do not smoke when working. Ensure adequate ventilation and avoid inhaling vapours when working. Always use with suitable personal protective equipment.



DELTA STARLITE 500 (FLOOR)

Polyester Urethane Coating for Concrete Substrates

Chemical Resistance List

Chemical	Result
Acetic Acid (10%)	No effect
Acetic Acid (25%)	No effect
Acetic Acid (40%)	No effect
Acetic Acid (99%)	No effect
Brine (Saturated sodium chloride)	No effect
Calcium Chloride (50%)	No effect
Calcium Hydroxide (Saturated)	No effect
Citric Acid (20%)	No effect
Citric Acid (60%)	No effect
Detergent (Alkaline)	No effect
Formic Acid (40%)	No effect
Formic Acid (70%)	No effect
Formic Acid (90%)	Very faint mark
Formic Acid (99%)	Very faint mark
Gasoline	No effect
Hydrochloric Acid (10%)	No effect
Hydrochloric Acid (37%)	No effect
2-propanol (99%)	No effect
Jet Fuel	No effect
Kerosene	No effect
Methanol (99%)	No effect
Methylene Chloride (99%)	No effect
Methyl Ethyl Ketone (99%)	No effect

Chemical	Result
Motor Oil	No effect
Nitric Acid (5%)	No effect
Nitric Acid (30%)	No effect
Nitric Acid (65%)	Severe mark (Blistering)
Phosphoric Acid (5%)	No effect
Phosphoric Acid (40%)	No effect
Phosphoric Acid (50%)	No effect
Phosphoric Acid (85%)	Faint mark
Potassium Hydroxide (50%)	No effect
Sodium Chloride (Saturated)	No effect
Sodium Hydroxide (20%)	No effect
Sodium Hydroxide (32%)	No effect
Sodium Hydroxide (50%)	No effect
Sodium Hypochlorite (15%)	No effect
Sulfuric Acid (5%)	No effect
Sulfuric Acid (30%)	No effect
Sulfuric Acid (50%)	Faint mark
Sulfuric Acid (98%)	Severe mark (Peel off)
THF (99%)	No effect
Toluene (99%)	No effect
Distilled Water	No effect
White Spirit	No effect
Xylene (99%)	No effect