




# DELTA NANO 100 PRIMER

Nano Titanium Dioxide Self-Cleaning Solution

## DESCRIPTION

Delta Nano 100 Primer comprises of water-based nano-sized TiO<sub>2</sub> (titanium dioxide) solution. It serves as a barrier layer between Delta Starlite PU 118 and Delta Nano 100 Top.

## SYSTEM DESIGN

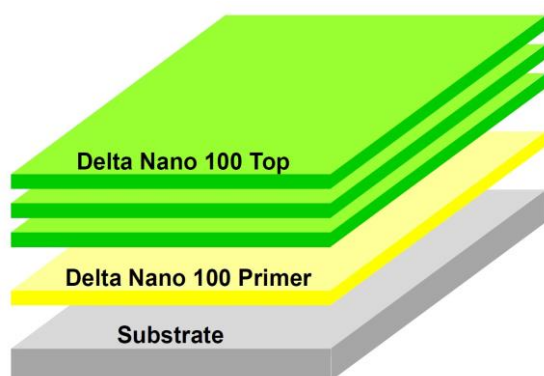

## BENEFITS

- ❖ Protect painted surfaces from the oxidation effect of Delta Nano 100 Top.
- ❖ Eco-friendly technology

## USES

- ❖ As a primer for Delta Nano 100 Top

## FINISH

Transparent finishing

## COLOUR

Clear – light yellowish

## SURFACE PREPARATION

For Delta Nano 100 Self Cleaning Paint System, apply once Delta Starlite PU 118 is dry.

## APPLICATION

- 1 pass of Delta Nano 100 Primer @ 75 – 90 m<sup>2</sup>/lit/pass

Tools – Applied by spray gun with atomized air and alternating vertical and horizontal spray movement.

Recoating Time – Min : When coating is dry.  
Max: 24 hours before application of Delta Nano 100 Top.

## TECHNICAL AND APPLICATION DATA

1) Industrial Hygiene Monitoring tested by Setsco	See report enclosed
---	---------------------

## STORAGE CONDITIONS AND SHELF LIFE

The solution should be stored in a cool, dry place without exposure to direct sunlight. Shelf life is 12 months.

## PACKAGING

1 litre/bottle

## SAFETY

General PPE and safety measures for chemicals to be complied with. There should be appropriate ventilation and exhaust at application area.

**Delta Intercontinental Pte Ltd**  
38 Woodlands Industrial Park E1, #06-04  
Singapore 757700

Tel : +65 6219 0700 Fax: +65 6219 2822  
Email : [deltaintercon@singnet.com.sg](mailto:deltaintercon@singnet.com.sg)  
Website : [www.deltaintercon.com.sg](http://www.deltaintercon.com.sg)

Ref. No.: 052020