

DELTA NANO ANTI ALGAE PAINT SYSTEM

Nano Titanium Dioxide Anti-Algae Paint System



DESCRIPTION

Before:



After:



A Nano Technology coating system that incorporates nano TiO₂ (titanium dioxide) and other proprietary nano particles for maximum anti algae effect.

Delta Nano Anti Algae Paint System comprises of:

- Delta Starlite 117A* – a solvent-based acrylic primer.
- Delta Starlite PU 118A* – a solvent-based polyurethane coating integrated with proprietary nano-sized functional additives to enhance the anti-algae effect.
- Delta Nano Anti Algae Top* – a water-based nano-sized TiO₂ (titanium dioxide) topcoat which has the active ingredient that gives the anti-algae effect.

BENEFITS

- ❖ Prevent unsightly algae growth on exterior painted surfaces
- ❖ Improve aesthetics of buildings

USES

- ❖ For anti-algae of painted surfaces of building façade.

SURFACE PREPARATION

Substrates to be coated must be structurally sound, clean and free from any contamination. Use mechanical stone grinding or other mechanical means to remove laitance. All residues must be removed by vacuum cleaning to provide a dry, dust free open textured surface. For other specific application, consult DELTA INTERCONTINENTAL P/L.

FINISH

Gloss

COLOUR

Extensive selection available

PACKAGING

- Delta Starlite 117A : 5lit/pail
- Delta Starlite PU 118A : 5lit/set
- Delta Nano Anti Algae Top : 1lit/bottle

Delta Intercontinental Pte Ltd
38 Woodlands Industrial Park E1, #06-04
Singapore 757700

Tel : +65 6219 0700 Fax: +65 6219 2822
Email : deltaintercon@singnet.com.sg
Website : www.deltaintercon.com.sg


Ref. No.: 042021

DELTA NANO ANTI ALGAE PAINT SYSTEM

Nano Titanium Dioxide Anti-Algae Paint System



APPLICATION

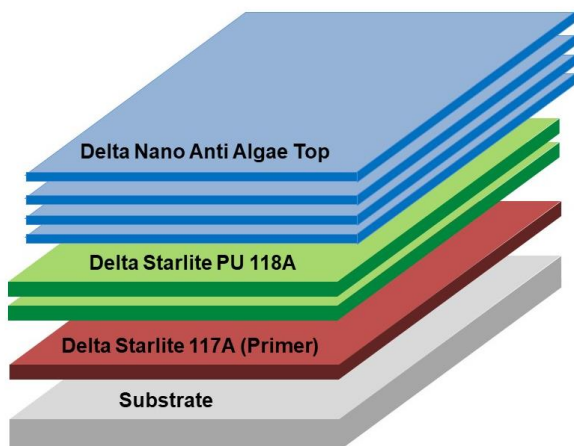

- ❖ 1 coat of Delta Starlite 117A @ 8 m²/lit/coat @ 25µm/coat
- ❖ 2 coats of Delta Starlite PU 118A @ 10 m²/litre/coat @ 50µm/coat.
- ❖ 4 passes of Delta Nano Anti Algae Top @ 75 - 90 m²/litre/pass.
Subjected to site condition, more passes can be applied.

Tools:

- ❖ Delta Starlite 117A and Delta Starlite PU 118A - applied by brush, short nap roller or airless sprayer.
- ❖ Delta Nano Anti Algae Top - applied by spray gun with atomized air and alternating vertical and horizontal spray movement.

Recoating Time:

- ❖ Delta Starlite 117A – Min : 8 hours @ 35°C
Max : 7 days @ 35°C
- ❖ Delta Starlite PU 118A - Min : 3 hours @ 35°C
Max : 7 days @ 35°C

- ❖ Delta Nano Anti Algae Top - Interval between pass: when previous pass is dry.

TECHNICAL AND APPLICATION DATA

Delta Starlite 117A	
Flash Point	>25°C
Volume Solid	43%
No. of Components	1
Recommended DFT	25µm per coat
Delta Starlite PU 118A	
Flash Point	29°C
Volume Solid	60%
Recommended DFT	50 - 75µm per coat
No. of components	2
Mixing ratio (by vol)	6.6 : 1 Part A : Part B
Pot Life	90 min @ 35°C
Delta Nano Anti Algae Top	
Anti Microbial (JIS R1702:2006)	See report enclosed
Industrial Hygiene Monitoring tested by Setsco	See report enclosed
Accelerated Weathering (ISO 11341:2004)	See report enclosed
Anti Algae	See report enclosed

STORAGE CONDITIONS AND SHELF LIFE

All materials should be stored in a cool, dry place without exposure to direct sunlight. Shelf life of all materials is 12 months.

SAFETY

General PPE and safety measures for chemicals to be complied with. There should be appropriate ventilation and exhaust at application area.

Delta Intercontinental Pte Ltd
38 Woodlands Industrial Park E1, #06-04
Singapore 757700

Tel : +65 6219 0700 Fax: +65 6219 2822
Email : deltaintercon@singnet.com.sg
Website : www.deltaintercon.com.sg